



HL COMPACT

The HL Compact is a space-efficient LED headlight that is specifically designed for installation on slow-moving machines. It is an attractive, drop-in replacement for old halogen headlights on wheeled excavators, terminal tractors, wheel loaders, and dump trucks. The HL Compact complies with ECE regulations R112, R87, R7, and R10.

The HL Compact LED drive light can be paired with TYRI's LED turn marker, which is designed to work seamlessly alongside the HL Compact to create an aesthetically pleasing overall design.



TECHNICAL DATA

- Housing Material:** Cast Aluminium
- Mounting Options:** Recessed
- Lens Material:** PC
- Temperature range:** -40 to +70 °C
- Connector:** Deutsch (DT04-6P) with 150mm cable. Mating part: DT06-6S
- Weight:** 940 g / 2,07 lb
- Light Patterns:** Low Beam
High Beam



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G
- IP69K
- ECE R10 - EMC
R112 - Asymmetric headlight
R87 - Daytime running lamp
R7 - Position lamp

For further information visit www.tyrilights.com or contact your local sales team.

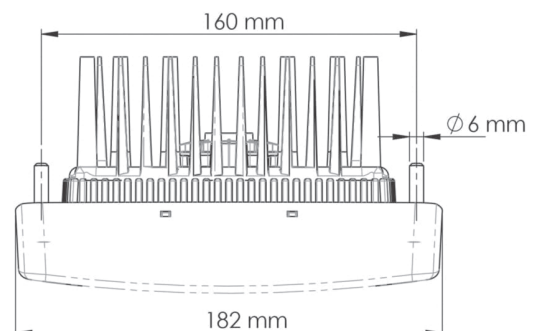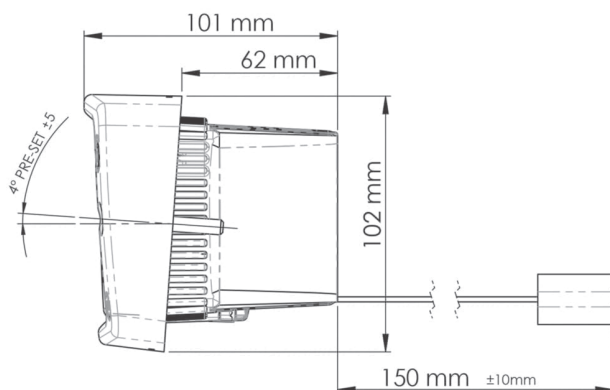




HL COMPACT


LIGHT FUNCTION	LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOR TEMP	LENS PATTERN	PART NO.	ECE
		Machine	Operating	12 V	24 V					
Low Beam	700 eLm	12 V	9-16 V	1,7 A	- A	24 W	6,000 K			R10 & 112
High Beam	1,500 eLm	12 V	9-16 V	3,3 A	- A	46 W	6,000 K			R10 & 112
DRL	NA	12 V	9-16 V	0,6 A	- A	8 W	NA			R87
Position Light	NA	12 V	9-16 V	0,08 A	- A	1 W	NA			R7
Low Beam	700 eLm	24 V	18-32 V	- A	1,0 A	24 W	6,000 K			R10 & 112
High Beam	1,500 eLm	24 V	18-32 V	- A	1,8 A	43 W	6,000 K			R10 & 112
DRL	NA	24 V	18-32 V	- A	0,4 A	8 W	NA			R87
Position Light	NA	24 V	18-32 V	- A	0,04 A	1 W	NA			R7

TYPICAL LIGHT PATTERNS


Example for HL Compact / 700 & 1,500 effective lumen

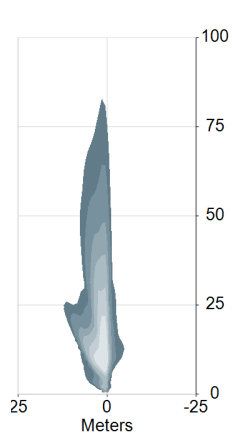

HL Compact / 700 eLm
Low Beam
1.0 m / 0°
Asymmetric

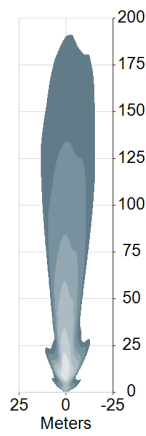

HL Compact / 1,500 eLm
High Beam
1.0 m / 0°
Symmetric



LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.