



1310



The 1310 is a vertical oval light that is suitable for forklift trucks and other. Used where you want a unique shape to make your vehicle stand out.

TECHNICAL DATA

Housing Material: Cast Aluminium
Mounting Options: Hanging
Standing
Lens Material: Polycarbonate
Temperature range: -40 to +75 °C
Connector: Deutsch (DT04-2P)
built in.
Mating part: DT06-2S
Weight: 450 g / 1.0 lb
Light Patterns: Medium Symmetric



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- CE - marked

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25 Class 5,
ISO7637-2, ISO10605, ISO11452-2,
ISO11452-4, ISO16750-2

For further information visit www.tyriLights.com or contact your local sales team.

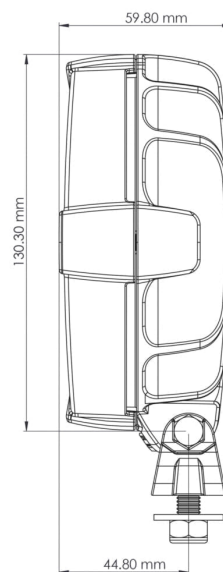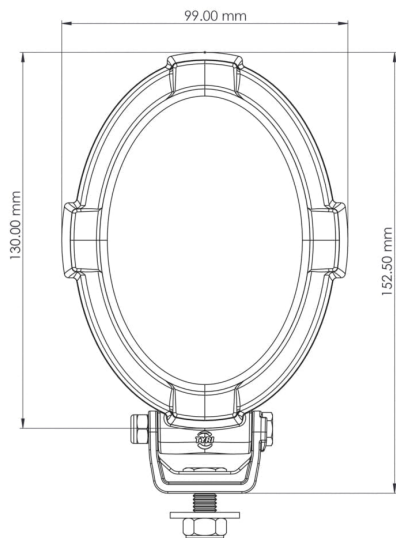



1310

| LIGHT OUTPUT | VOLTAGE | | AMP DRAW | | POWER | COLOUR TEMPERATURE | EMC | ECE |
|--------------|---------|-----------|----------|-------|-------|--------------------|-------|-----|
| | Machine | Operating | 12 V | 24 V | | | Watts | K |
| 750 eLm | 12-48 V | 9-60 V | 1,2 A | 0,6 A | 14 W | 5,000 K | 5 | - |
| 1,400 eLm | 12-48 V | 9-60 V | 1,7 A | 0,9 A | 21 W | 5,000 K | 5 | - |

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.