



1010 WITH TURN MARKER

This all-in-one unit contains both a 1010 and a turn signal marker, making it a highly versatile and professional lighting solution. It can be used with any 1010 Curve work light that offers 750 to 2,800 effective lumen options.



1010 with Turn Marker comes in two versions; Turn Marker with Amber LEDs or with Amber Lens

TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Hanging Standing
Lens Material:	Polycarbonate
Temperature range:	-40 to +85 °C
Connector:	Deutsch (DT04-2P) built in Deutsch (DT04-4P) built in
Weight:	1,3 g / 2,87 lbs
Light Patterns:	Narrow Symmetric Medium Symmetric Wide Symmetric Medium Asymmetric Wide Asymmetric


FEATURES

-  Overheating Protection
-  Over-voltage Protection
-  Polarity Protection
-  Dampened
-  UL Optional

TEST STANDARDS

-  Salt Spray ASTM B117 500 h
-  Vibration 5-2000 Hz 3 Axis, 10 Grms
-  Shock Tested 50 G 11 ms
-  IP69K
-  EMC EN55025 / CISPR 25 Class 5
ISO 11452-2 / ISO 11452-4 /
ISO 16750-2 / ISO 10605 /
ISO 7637-2
-  ECE R10 & R23

For further information visit www.tyrlights.com or contact your local sales team.

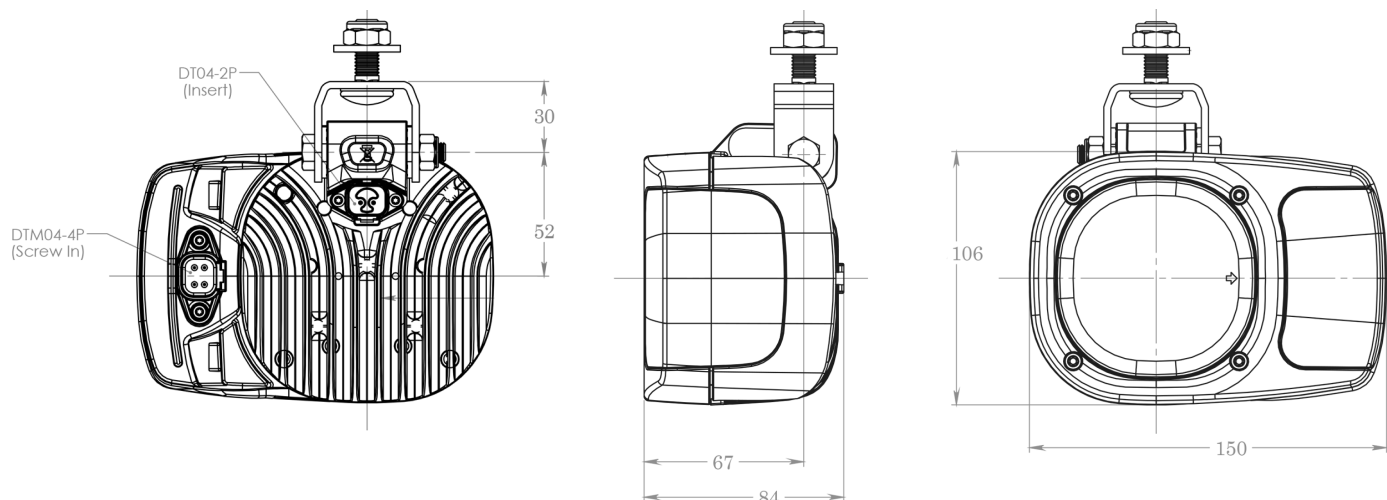



1010 WITH TURN MARKER

1010 - MAIN LIGHT

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOR TEMP	LENS PATTERN	PART NO.	EMC	ECE
Effective Lumen	Machine	Operating	12 V	24 V	Watts	K			EN55025 / CISPR25	ECE Rating
850 eLm	12-48 V	9-60 V	1,4 A	0,7 A	17 W	5,700 K			4	R10
1,400 eLm	12 V	9-16 V	1,8 A	-	22 W	5,700 K			5	-
1,400 eLm	24 V	18-32 V	-	0,9 A	22 W	5,700 K			5	-
1,450 eLm	12-48 V	9-60 V	2,5 A	1,3 A	30 W	5,700 K			5	-
1,850 eLm	12 V	9-16 V	2,3 A	-	29 W	5,700 K			5	-
1,850 eLm	24 V	18-32 V	-	1,2 A	29 W	5,700 K			5	-
1,900 eLm	12-48 V	9-60 V	2,5 A	1,3 A	30 W	5,700 K			5	-
2,000 eLm	12 V	9-16 V	2,2 A	-	35 W	5,700 K			5	-
2,000 eLm	24 V	18-32 V	-	1,3 A	35 W	5,700 K			5	-
2,500 eLm	12 V	9-16 V	1,9 A	-	23 W	5,700 K			5	-
2,500 eLm	24 V	18-32 V	-	1,1 A	26 W	5,700 K			5	-
2,500 eLm	12-48 V	9-60 V	2,8 A	1,4 A	33 W	5,700 K			5	-

TURN MARKER

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOR TEMP	LENS PATTERN	PART NO.	EMC	ECE
Effective Lumen	Machine	Operating	12 V	24 V	Watts	K			EN55025 / CISPR25	ECE Rating
-	12 V	9-16 V	0,2 A	-	5 W	Amber	-	*	5	-
-	12-48 V	9-60 V	0,3 A	0,1 A	3 W	Amber	-	*	4	-

* Based on main light part no.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.