



1310

The 1310 is a vertical oval light that is suitable for use on forklift trucks and other vehicles where a unique shape is desired to make it stand out.



TECHNICAL DATA

- Housing Material:** Cast Aluminium
- Mounting Options:** Hanging
Standing
- Lens Material:** Polycarbonate
- Temperature range:** -40 to +75 °C
- Connector:** Deutsch (DT04-2P) built in.
Mating part: DT06-2S
- Weight:** 450 g / 1,0 lb
- Light Patterns:** Medium Symmetric



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- UL Optional

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25 Class 5, ISO7637-2, ISO10605, ISO11452-2, ISO11452-4, ISO16750-2

For further information visit www.tyriLights.com or contact your local sales team.

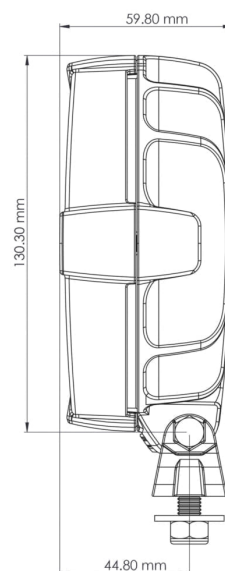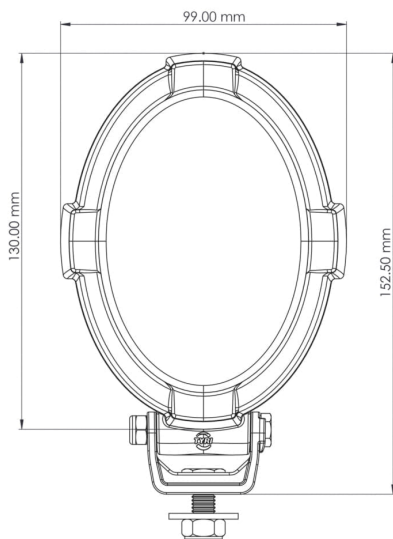



1310

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOR TEMP	LENS PATTERN	BRACKET / ORIENTATION	PART NO.	EMC
	Effective Lumen	Machine	Operating	12 V	24 V	Watts				
750 eLm	12-48 V	9-60 V	1,2 A	0,6 A	14 W	5,000 K	Medium Symmetric	Hanging	SLU-001-1	EN55025 / CISPR25 5
							Medium Symmetric	Standing	SLU-007-1	
1,400 eLm	12-48 V	9-60 V	1,7 A	0,9 A	21 W	5,000 K	Medium Symmetric	Hanging	SLU-002-1	5
							Medium Symmetric	Standing	SLU-011-1	

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.