



1706A MARKER






Ensure clear signals, whether you are reversing, indicating or stopping your machine, with the 1706A Marker LED. The oval shape and size of this light is common on many vehicles and it is available with red, white or amber lens colours.

The rubber grommet allow for an easy flush installation on 12 or 24 volt vehicle systems.

TECHNICAL DATA

- Housing Material: PC
- Mounting Options: Flush
- Lens Material: PC
- Temperature range: -40 to +50 °C
- Connector: 3 way super seal



FEATURES

-  Overheating Protection
-  Over-voltage Protection
-  Polarity Protection

TEST STANDARDS

-  IP69K

For further information visit www.tyrilights.com or contact your local sales team.

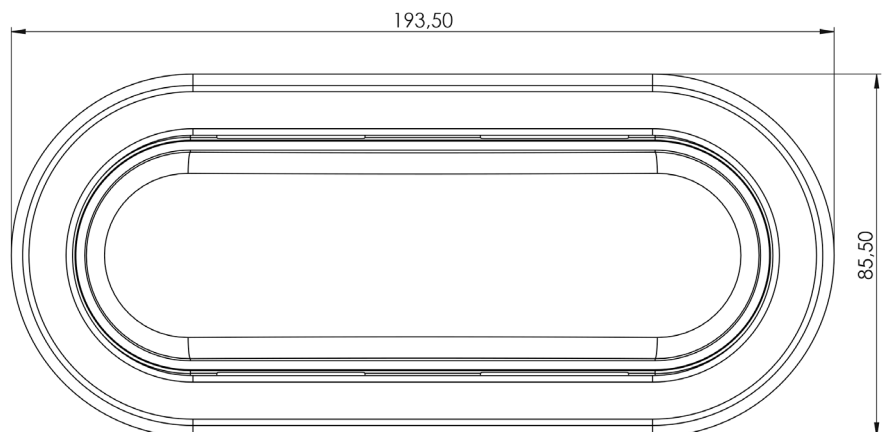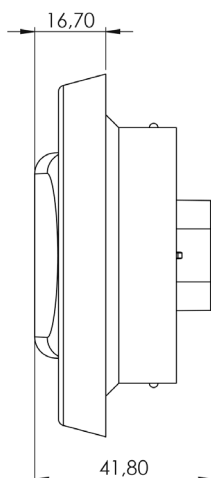



1706A MARKER

LENS COLOUR	VOLTAGE		AMP DRAW		POWER Watts	EMC EN55025 / CISPR25	ECE Rating
	Machine	Operating	12 V	24 V			
Amber (turn)	12 V	9-16 V	0,04 A	- A	1 W	5	-
Amber (turn)	24 V	18-32 V	- A	0,3 A	1 W	5	-
Red (tail/stop)	12 V	9-16 V	0,04 A (tail)/ 0,2 A (stop)		1 W	5	-
Red (tail/stop)	24 V	18-32 V	- A	0,02 A (tail)/ 0,2 A (stop)	1 W	5	-
White (reverse)	12 V	9-16 V	0,1 A	- A	1 W	5	-
White (reverse)	24 V	18-32 V	- A	0,1 A	1 W	5	-

Product may not be available in all territories. Please check with your local TYRI office.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.