



1013

The 1013 LED work light with oval design is a cost-effective upgrade solution when looking to replace halogen lighting. It is used on forklift trucks or where you want an oval shape to make your vehicle stand out.



TECHNICAL DATA

| | |
|---------------------------|--|
| Housing Material: | Cast Aluminium |
| Mounting Options: | Hanging Standing |
| Lens Material: | Polycarbonate |
| Temperature range: | -40 to +75 °C |
| Connector: | Deutsch (DT04-2P) built in. Mating part: DT06-2S |
| Weight: | 450 g / 1.0 lb |
| Light Patterns: | Medium Symmetric Medium Asymmetric Spot |



FEATURES

| | |
|--|-------------------------|
| | Overheating Protection |
| | Over-voltage Protection |
| | Polarity Protection |
| | CE - marked |

TEST STANDARDS

| | |
|--|---|
| | Salt Spray ASTM B117 500 h |
| | Vibration 5-2000 Hz 3 Axis, 10 Grms |
| | Shock Tested 50 G 11 ms |
| | IP69K |
| | EN55025 / CISPR 25 Class 5, ISO7637-2, ISO10605, ISO11452-2, ISO11452-4, ISO16750-2 |

For further information visit www.tyrlights.com or contact your local sales team.

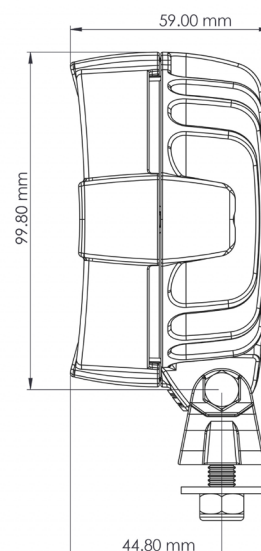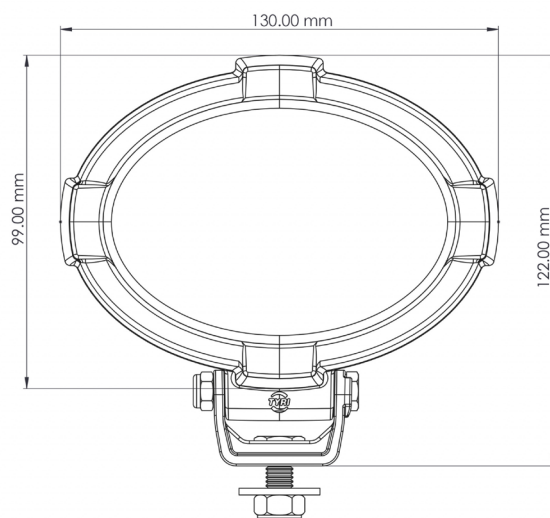



1013

| LIGHT OUTPUT | VOLTAGE | | AMP DRAW | | POWER | COLOUR TEMPERATURE | EMC | ECE |
|-----------------|---------|-----------|----------|-------|-------|--------------------|-------------------|------------|
| Effective Lumen | Machine | Operating | 12 V | 24 V | Watts | K | EN55025 / CISPR25 | ECE Rating |
| 750 eLm | 12-48 V | 9-60 V | 1,2 A | 0,6 A | 14 W | 5,000 K | 5 | - |
| 1,400 eLm | 12-48 V | 9-60 V | 1,7 A | 0,9 A | 21 W | 5,000 K | 5 | - |

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.