



VL4 BLUEPOINT

The VL4 BluePoint has a slimline appearance and can be mounted on a forklift truck with minimal protrusion, whilst delivering a bright blue square of light onto the floor, to warn of a vehicle approaching. VL4 LED work lights are available in the same housing available for unified lighting design.



Note: the lens of the BluePoint is clear, the blue light is emitted from LEDs

TECHNICAL DATA

| | |
|--------------------|--|
| Housing Material: | Cast Aluminium |
| Mounting Options: | Standing Hanging |
| Lens Material: | PC |
| Temperature range: | -40 to +85 °C |
| Connector: | Deutsch (DT04-2P) built in. Mating part: DT06-2S |
| Weight: | 435 g / 0,96 lb |
| Light Patterns: | Spot |


FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- CE - marked

TEST STANDARDS

- Salt Spray ASTM B117 48 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 10 ms
- IP69K
- EMC EN55025 / CISPR 25 Class 3, ISO11452-2, EN61000-6-2
- ECE R10

For further information visit www.tyriLights.com or contact your local sales team.

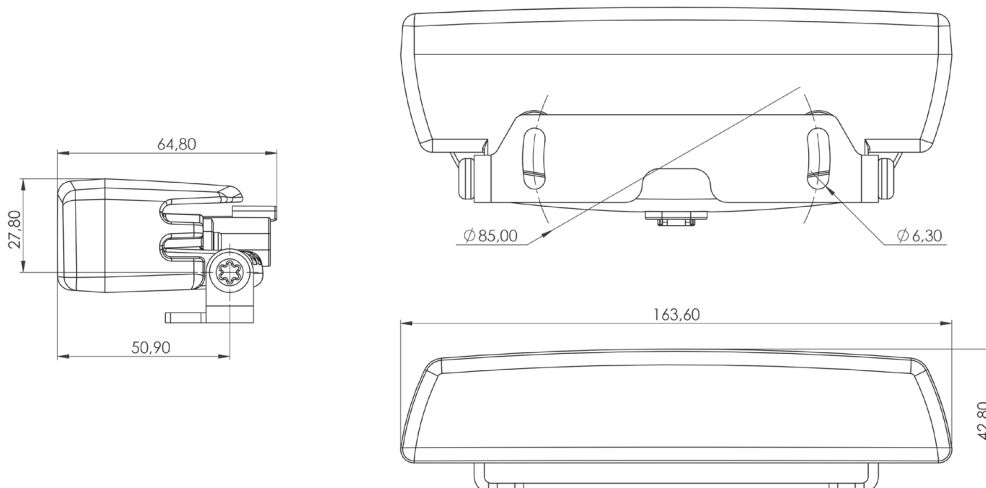



VL4 BLUEPOINT

| LIGHT OUTPUT | VOLTAGE | | AMP DRAW | | POWER | DOMINANT WAVELENGTH | EMC | ECE |
|----------------------|---------|-----------|----------|-------|---------------|---------------------|-------------------|------------|
| | Machine | Operating | 12 V | 24 V | | | EN55025 / CISPR25 | ECE Rating |
| Candela 15,000 cd | 12-48 V | 9-60 V | 1,2 A | 0,6 A | Watts 15 W | nm 475 nm | 3 | R10 |

IEC/SS-EN 62471 | RISK GROUP 2

CAUTION: Possibly hazardous optical radiation emitted from this product.
Do not stare at operating lamp. May be harmful to the eye.

It is important to remember, LED work lights are no more hazardous than other lighting technologies with the same correlated colour temperature (CCT).

TYRI complies with the IEC/SS-EN 62471 standard with the addition of the warning label on the product.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.