



DLM-09 BI-LED

The new TYRI DLM-09 driving light delivers powerful illumination while using less energy. Its efficient LED technology helps reduce energy costs and supports a more sustainable, environmentally friendly operation.

Despite its advanced technology, this driving light remains competitively priced, offering outstanding value without compromising performance or durability.

DLM-09 is available for both right-hand and left-hand traffic.



TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Recessed
Lens Material:	PC (glass coated)
Temperature range:	-40 to +70 °C
Connector:	Deutsch DT04-4P Mating part: DT06-4S
Weight:	1,1 Kg / 2,2 lb
Light Patterns:	Low Beam High Beam


FEATURES

-  Overheating Protection
-  Over-voltage Protection
-  Polarity Protection

TEST STANDARDS

-  Salt Spray ASTM B117 500 h
-  Vibration 5-2000 Hz 3 Axis, 10 Grms
-  Shock Tested 50 G
-  IP IP69K
-  ECE R10 & R149, RHT & LHT

For further information visit www.tyrilights.com or contact your local sales team.

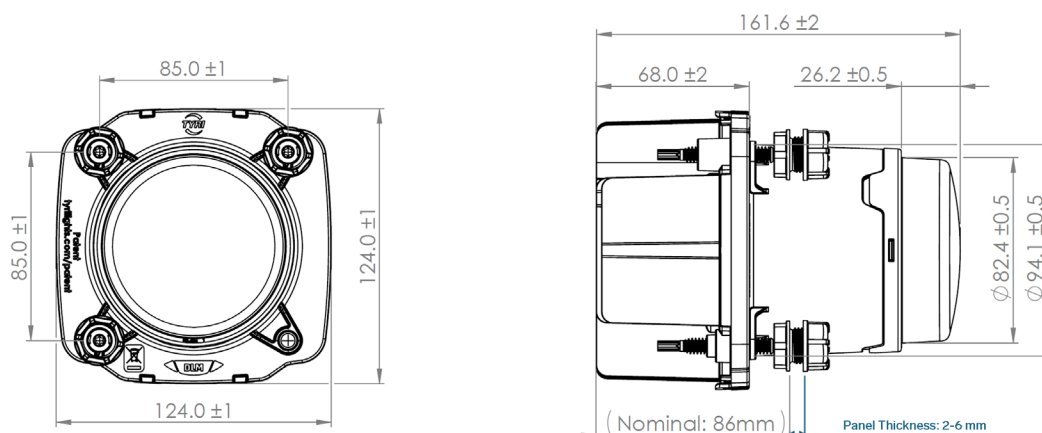




DLM-09 BI-LED


LIGHT FUNCTION	VOLTAGE		AMP DRAW		POWER		COLOR TEMP	PART NO.	ECE
	Machine	Operating	12 V	24 V	12 V	24 V	K		ECE Rating
Low Beam	12-24 V	9-32 V	1,4 A	0,7 A	17 W	17 W	5,700 K		R10 & R149
High Beam			3,2 A	1,4 A	38 W	34 W			

TYPICAL LIGHT PATTERNS - 1M (RIGHT HAND TRAFFIC)

DLM-09 Bi-LED
Low Beam
1,0 m

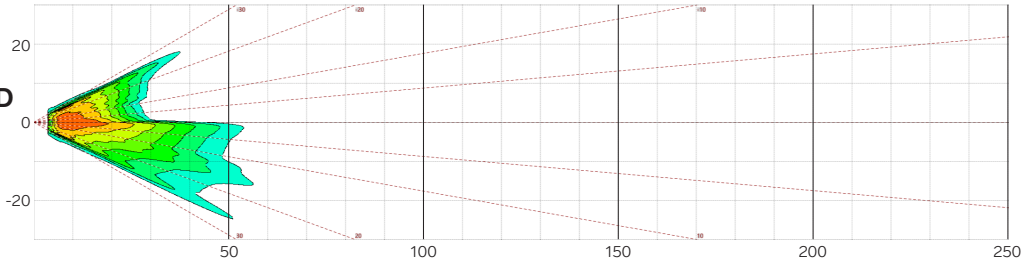


DLM-09 Bi-LED
High Beam
1,0 m

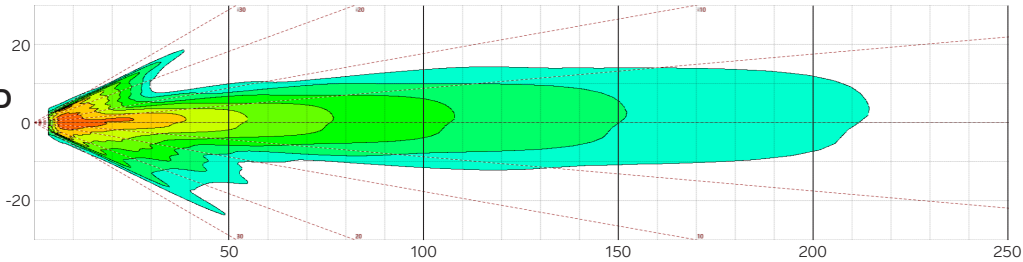

TYPICAL LIGHT PATTERNS - 2M (RIGHT HAND TRAFFIC)

DLM-09 Bi-LED
Low Beam
2,0 m

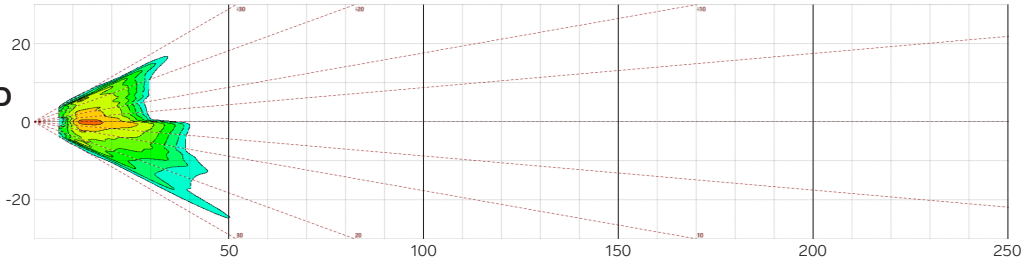

DLM-09 Bi-LED
High Beam
2,0 m

