




0522A

**STOP, TAIL, TURN
& BACK UP LIGHT**

Available with red, amber, and white LEDs or all white LEDs, the thru bolt design allows this light to be mounted in a variety of locations on machines. The 0522A is available in an all white LED option great in a dome light application.



TECHNICAL DATA

- Housing Material: PC
- Mounting Options: Flush
- Lens Material: PC
- Temperature range: -40 to +75 °C
- Connector: Bare wires


FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection

TEST STANDARDS

- IP69K
- EN55025 / CISPR 25 Class 5
ISO 11452-2 / ISO 11452-4
ISO 16750-2 / ISO 10605
ISO 7637-2

For further information visit www.tyriLights.com or contact your local sales team.

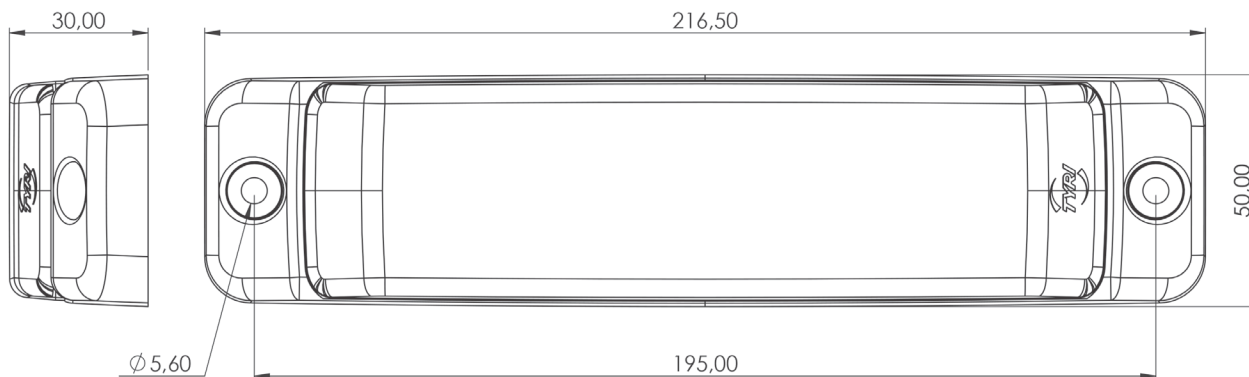



0522A

STOP, TAIL, TURN & BACK UP LIGHT

LED COLOUR	VOLTAGE		AMP DRAW		POWER	EMC	ECE
	Machine	Operating	12 V	24 V	Watts	EN55025 / CISPR25	ECE Rating
6 Red / 6 Amber / 6 White	12 V	9-16 V	0,12 A (stop)	- A	1,4 W (stop)	5	-
			0,03 A (tail)		0,4 W (tail)		
			0,13 A (turn)		1,6 W (turn)		
			0,09 A (reverse)		1,1 W (reverse)		
6 Red / 6 Amber / 6 White	12-80 V	9-108 V	0,1 A (stop)	0,05 A (stop)	1,2 W (stop)	5	-
			0,08 A (tail)	0,04 A (tail)	1,0 W (tail)		
			0,16 A (turn)	0,08 A (turn)	1,9 W (turn)		
			0,18 A (reverse)	0,09 A (reverse)	2,2 W (reverse)		

Product may not be available in all territories. Please check with your local TYRI office.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.