



0909 COMPACT+ BLUEPOINT



Note: the lens of the Bluepoint is clear, the blue light is emitted from LEDs

The 0909 Compact+ BluePoint has a slim housing and a curved lens. It is UL certified and carries an IP rating of 69K. This warning light is also available as a standard work light, allowing you to match your machine lighting for a unified design.

TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Hanging Standing
Lens Material:	Polycarbonate
Temperature range:	-40 to +85 °C
Connector:	Deutsch (DT04-2P) built in. Mating part: DT06-2S
Weight:	300 g / 0,66 lb
Light Patterns:	Spot



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- CE - marked

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 12-200 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25
Class 3 - Metal bracket
Class 5 - PA6 bracket
ISO7637-2, ISO10605, ISO11452-2,
ISO11452-4, ISO16750-2

For further information visit www.tyriLights.com or contact your local sales team.

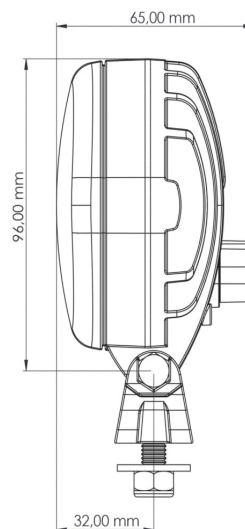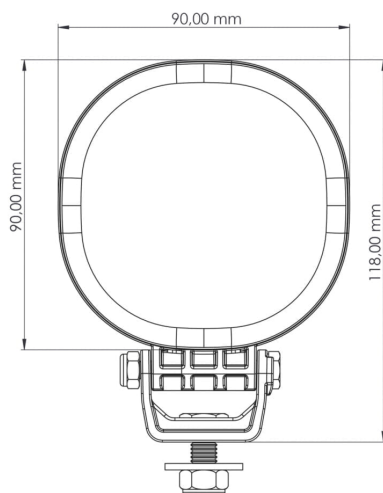



0909 COMPACT+ BLUEPOINT

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH	EMC	ECE
	Machine	Operating	12 V	24 V			EN55025 / CISPR25	ECE Rating
Candela					Watts	nm		
20,000 cd	12-48 V	9-60 V	1,4 A	0,7 A	17 W	475 nm	3 & 5	-

IEC/SS-EN 62471 | RISK GROUP 2

CAUTION: Possibly hazardous optical radiation emitted from this product.
Do not stare at operating lamp. May be harmful to the eye.

It is important to remember, LED work lights are no more hazardous than other lighting technologies with the same correlated colour temperature (CCT).

TYRI complies with the IEC/SS-EN 62471 standard with the addition of the warning label on the product.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.