



1010 REDPOINT

1010 RedPoint increases safety and minimises the risk of accidents. Allowing safety to be visual instead of relying solely on sirens or alarms, especially in noisy environments. The 1010 RedPoint projects a concentrated light beam as a large, visible square on the floor in front or behind the machine. This warning light is available as a standard work light, allowing you to match your machine lighting for a unified design.



Note: the lens of the RedPoint is clear, the red light is emitted from LEDs

TECHNICAL DATA

- Housing Material:** Cast Aluminium
- Mounting Options:** Hanging
Standing
- Lens Material:** PC
- Temperature range:** -40 to +75 °C
- Connector:** Deutsch (DT04-2P)
built in.
Mating part: DT06-2S
- Weight:** 616 kg / 1.36 lb
- Light Patterns:** Spot



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- CE - marked
- Dampened

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 12-200 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25 Class 4,
ISO 7637-2, ISO 16750-2, ISO 10605,
ISO11452-2, ISO11452-4

For further information visit www.tyrilights.com or contact your local sales team.

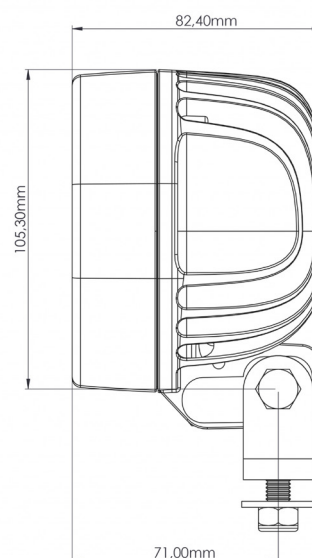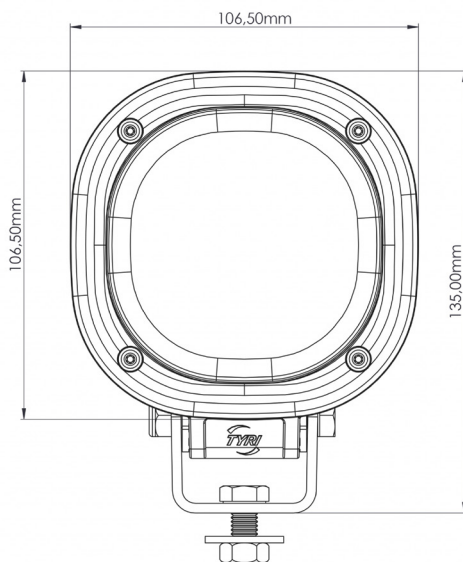



1010 REDPOINT

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH	EMC	ECE
	Machine	Operating	12 V	24 V			EN55025 / CISPR25	ECE Rating
Candela	Machine	Operating	12 V	24 V	Watts	nm	EN55025 / CISPR25	ECE Rating
20 000 cd	12-48 V	9-60 V	1.4 A	0.7 A	15 W	630 nm	4	-

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.