



1010 RECESS




This work light features a distinctive mounting option that allows for the light to be recessed into the vehicle. The 1010 Recess, with a brightness of 2.500 lumens, can be installed in a closed housing unit without the need for cooling the rear flanges, thanks to its technical specifications.








TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Recessed
Lens Material:	PC & Grilamid
Temperature range:	-40 to +75 °C
Connector:	Deutsch (DT04-2P) built in. Mating part: DT06-2S
Weight:	1,05 kg / 2,33 lb
Light Patterns:	Narrow Symmetric Medium Symmetric Wide Symmetric Medium Asymmetric Wide Asymmetric



FEATURES

-  Overheating Protection
-  Over-voltage Protection
-  Polarity Protection

TEST STANDARDS

-  Salt Spray ASTM B117 500 h
-  Vibration 5-2000 Hz 3 Axis, 10 Grms
-  Shock Tested 50 G 11 ms
-  IP69K
-  EN55025 / CISPR 25 Class 5, ISO7637-2, ISO10605, ISO11452-2, ISO11452-4, ISO16750-2

For further information visit www.tyrlights.com or contact your local sales team.

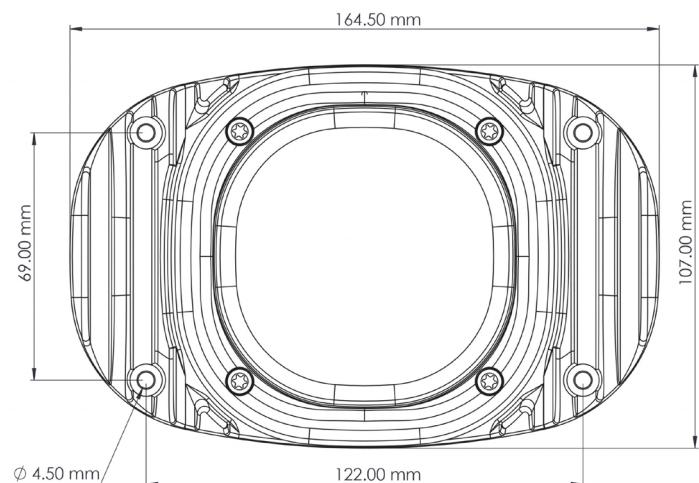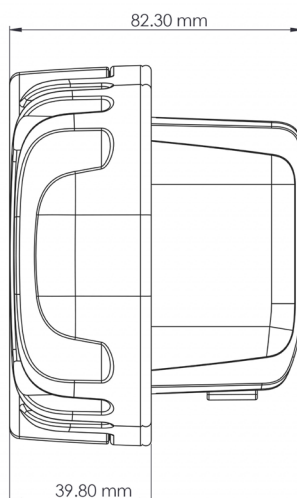



1010 RECESS

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOR TEMP	LENS PATTERN	PART NO.	EMC	ECE
Effective Lumen	Machine	Operating	12 V	24 V	Watts	K			EN55025 / CISPR25	ECE Rating
850 eLm	12-48 V	9-60 V	1,4 A	0,7 A	17 W	5,700 K			5	-
1,400 eLm	12-48 V	9-60 V	1,5 A	0,8 A	19 W	5,700 K			5	-
1,900 eLm	12-48 V	9-60 V	2,4 A	1,2 A	29 W	5,700 K			5	-
2,500 eLm	12 V	9-18 V	1,8 A	- A	22 W	5,700 K			5	-
2,500 eLm	24 V	18-32 V	-	1,0 A	24 W	5,700 K			5	-
3,200 eLm	12-48 V	9-60 V	3,0 A	1,5 A	36 W	5,700 K	Medium Symmetric	CLF-113-1	5	-
							Wide Asymmetric	CLF-114-1		

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.