



VL4 BLUEPOINT

The VL4 BluePoint features a sleek design and can be mounted on a forklift truck with minimal protrusion, while still emitting a bright blue square of light onto the floor to warn of an approaching vehicle.

The VL4 LED work lights are also available in the same housing, allowing for a unified lighting design.







Note: the lens of the BluePoint is clear, the blue light is emitted from LEDs







TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Standing Hanging
Lens Material:	PC
Temperature range:	-40 to +85 °C
Connector:	Deutsch (DT04-2P) built in. Mating part: DT06-2S
Weight:	435 g / 0,96 lb
Light Patterns:	Spot


FEATURES

-  Overheating Protection
-  Over-voltage Protection
-  Polarity Protection
-  UL Optional

TEST STANDARDS

-  Salt Spray ASTM B117 48 h
-  Vibration 5-2000 Hz 3 Axis, 10 Grms
-  Shock Tested 50 G 10 ms
-  IP69K
-  EMC EN55025 / CISPR 25 Class 3,
ISO11452-2, EN61000-6-2
-  ECE R10

For further information visit www.tyrilights.com or contact your local sales team.

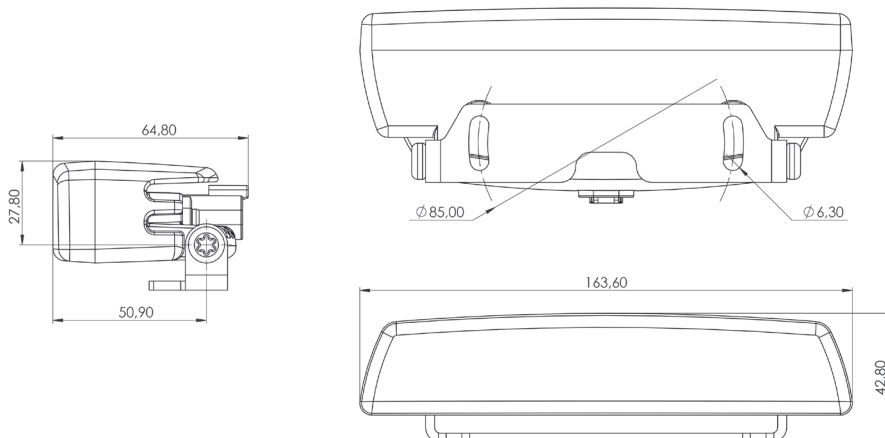



VL4 BLUEPOINT

LIGHT INTENSITY	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH	LENS PATTERN	PART NO.	EMC	ECE
Candela	Machine	Operating	12 V	24 V	Watts	nm			EN55025 / CISPR25	ECE Rating
15,000 cd	12-48 V	9-60 V	1,2 A	0,6 A	15 W	475 nm	BluePoint	VL4-177-1	3	R10

IEC/SS-EN 62471 | RISK GROUP 2

CAUTION: Possibly hazardous optical radiation emitted from this product.
Do not stare at operating lamp. May be harmful to the eye.

It is important to remember, LED work lights are no more hazardous than other lighting technologies with the same correlated colour temperature (CCT).

TYRI complies with the IEC/SS-EN 62471 standard with the addition of the warning label on the product.

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.