



0909 COMPACT+ BLUEBEAM

The 0909 Compact+ BlueBeam has a slim housing and a curved lens.

BlueBeam and RedBeam are powerful spotlights, with a wider beam pattern than the BluePoint and RedPoint.

Along with the bright blue colour, the BlueBeam serves a practical purpose, ensuring operators of crop sprayers have full visibility of the nozzle spray being spread across the fields with its powerful illumination.



Note: the lens of the BlueBeam is clear, the blue light is emitted from LEDs

TECHNICAL DATA

Housing Material:	Cast Aluminium
Mounting Options:	Hanging Standing
Lens Material:	Polycarbonate with protection coating
Temperature range:	-40 to +85 °C
Connector:	Deutsch (DT04-2P) built in. Mating part: DT06-2S
Weight:	300 g / 0,66 lb
Light Patterns:	Wide Spot



FEATURES

	Overheating Protection
	Over-voltage Protection
	Polarity Protection
	CE - marked

TEST STANDARDS

	Salt Spray ASTM B117 500 h
	Vibration 12-200 Hz 3 Axis, 10 Grms
	Shock Tested 50 G 11 ms
	IP69K
	EN55025 / CISPR 25 Class 3 - Metal bracket Class 5 - PA6 bracket ISO7637-2, ISO10605, ISO11452-2, ISO11452-4, ISO16750-2

For further information visit www.tyrlights.com or contact your local sales team.

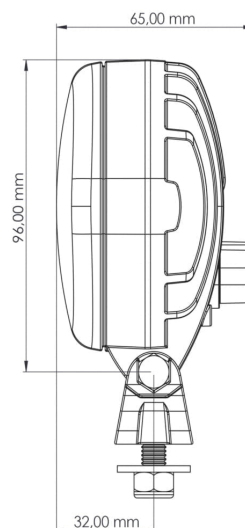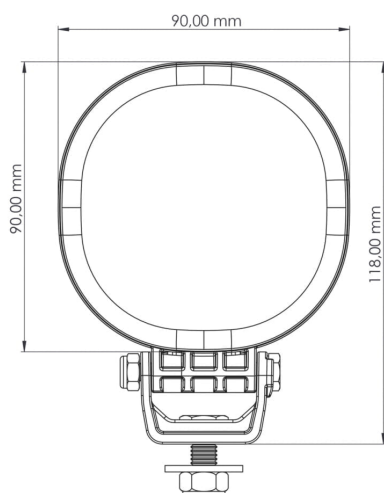



0909 COMPACT+ BLUEBEAM

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH	EMC	ECE
Candela	Machine	Operating	12 V	24 V	Watts	nm	EN55025 / CISPR25	ECE Rating
8,500 cd	12-48 V	9-60 V	1,4 A	0,7 A	17 W	475 nm	3 & 5	-

IEC/SS-EN 62471 | RISK GROUP 2

CAUTION: Possibly hazardous optical radiation emitted from this product.
Do not stare at operating lamp. May be harmful to the eye.

It is important to remember, LED work lights are no more hazardous than other lighting technologies with the same correlated colour temperature (CCT).
TYRI complies with the IEC/SS-EN 62471 standard with the addition of the warning label on the product.